

now with

7 Years
Warranty

TRANS[®]
P A I N T

www.transpaint.yungkong.com

Nu-Cote[®]
WEATHER



NU-COTE WEATHER



Water-Based
Low VOC
Heavy-Metals Free
APEO Free

Premium exterior satin wall finish (water-based)	
Standard Packing	5L & 20L (White Only) <i>1L, 5L & 20L available via Colour Waves™</i>
Colour	Ralston Inspiration Trend Colour 150 Your Style Collection
Application	Exterior and Interior
For use on	Concrete/ Masonry
100% acrylic water based finish - Superior alkaline and efflorescence resistance - Outstanding water and stain resistance - Approved by SIRIM to MS 134:2007 7-Year Limited Product Warranty	



NU-COTE WEATHER

This is a high quality 100% acrylic emulsion paint specially designed for exterior durability. It has excellent resistance to natural weathering and fungus growth. It is best used for decoration and protection of exterior building surfaces. This **water-based** product features **low VOC**, **heavy-metals free** and **APEO free**, formulated with great care for your ease of mind when considering its effect to your health and the environment.

Standard	Approved to Malaysian Standard 134:2007 (Cert. No. PT001302)	
Colour	9102 White (standard colour)	
	<i>Colours available via Colour Waves</i>	
Pack Size	5 and 20 litres (1L available via Colour Waves)	
Composition	<i>Binder</i>	Pure acrylic emulsion
	<i>Pigment</i>	Inorganic, organic pigments and mineral extenders
	<i>Solvent</i>	Water
Volume Solid	42 ± 2% for standard white, varying with colours	
Recommended Dry Film thickness	30 – 50 microns (per coat)	
Drying Times *	<i>Touch Dry</i>	Within 30 minutes
	<i>Hard Dry</i>	Within 1 hour
Full Cure *	3 – 4 weeks; Time for the coating to reach its full chemical/mechanical properties and will resist and perform as per the properties featured	
Over-coating Interval *	Minimum 2 hours	
Spreading Rate *	8 – 13 m ² /litre/coat	
Application	<i>Brush/Roller</i>	Use as is, thin not exceeding 5% by volume with water if necessary
	<i>Conventional Spray</i>	Thin with water to 20% by volume
	<i>Airless Spray</i>	Thin with water to 10% by volume
Surface Preparation	<u><i>New Unpainted Surface</i></u>	<u><i>Previous Painted Surface</i></u>
	- Ensure surface is clean and dry - Apply appropriate sealer	- Remove loose paint film by hard scraping/high pressure water jet - Treat fungi, algae or mould with fungicidal wash - Ensure dry off before painting
Recommended Painting System	<u><i>Sequence</i></u>	<u><i>Product</i></u>
	Concrete/Masonry Primer (1 coat) Finish (2 coats)	NU-COTE WALL SEALER/ PLUS AP SEALER SV (if surface is powdery) NU-COTE WEATHER

* Based on recommended thickness; will vary considerably with surface characteristics, application techniques, weather and wastage.

The corresponding Safety Data Sheet (SDS) for this product shall be provided upon request.

Further inquiry and SDS request can be made to transpaint@yungkong.com

Manufactured by: **Trans Paint Coatings Sdn Bhd**. Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, Malaysia.

Tel: +6082 334 222 Fax: +6082 339 189 Website: www.transpaint.yungkong.com

While every care has been taken to ensure the accuracy of the information contained in this data sheet, it is provided in good faith and that no liability can be accepted arising from its use. Where the conditions of use warrant it, it is recommended that the data are checked to ensure their suitability for the use envisaged.

Revision: **6 NOV 2023**

<end of document>

LESEN PENSIJILAN BARANGAN

Product Certification Licence



SIRIM QAS International Sdn. Bhd. dengan ini menganugerahkan kepada
SIRIM QAS International Sdn. Bhd. hereby grants to

**TRANS PAINT COATINGS SDN. BHD.
WISMA HII YII NGIHK
1ST FLOOR LOT 7573
JALAN KWONG LEE BANK
93450 KUCHING
SARAWAK, MALAYSIA**

Lesen untuk menggunakan Tanda Pensijilan di atas barangan
a licence to use the Certification Mark on

LATEX EMULSION PAINT FOR EXTERIOR AND INTERIOR USE

Please refer to detail in the SCHEDULE

sebagai mematuhi keperluan
as complying with

MS 134 : 2007



Nur Fadhilah binti Muhammad
Ketua Pegawai Eksekutif
Chief Executive Officer
SIRIM QAS International Sdn. Bhd.



SCHEDULE

TRANS PAINT COATINGS SDN. BHD.



Trade Mark : Nu-Cote
Model : NU-COTE WEATHER, NU-COTE FLOOR, NU-COTE UVWOOD
Rating : NON-TEXTURED

Factory Name and Location :
TRANS PAINT COATINGS SDN. BHD.
LOT 1393, JALAN MERANTI
BINTAWA INDUSTRIAL ESTATE
93450 KUCHING
SARAWAK, MALAYSIA

End of page

SEVEN-YEAR LIMITED PRODUCT PERFORMANCE WARRANTY

NU-COTE WEATHER

- PRE-WARRANTY NOTE -

TO WHOM IT MAY CONCERN

Promise of Quality

TRANS PAINT Nu-Cote Weather is guaranteed to provide film integrity and adhesion for the expected life of the paint system (Seven-Year). Should the paint is proved to fail without being affected or jeopardized by poor workmanship or by any underlying, external or surrounding factors, TRANS PAINT shall provide replacement paint based on the claim coverage schedule (clause 6) below to rectify the affected area after detailed investigation and upon presentation of the authorized limited product performance warranty.

We would like to inform you that the above warranty will only be issued subject to the following conditions being met:

1. Paint System

Exterior	No. of Coats	Maximum Dilution	Minimum Dry Film Thickness (DFT in microns)
Nu-Cote Wall Sealer or Pluss AP Sealer	1	5%	20
Nu-Cote Weather [selected exterior colours only; see D019_PREFERRED Exterior Colours From Ralston Inspiration (Nu-Cote Weather)]	2	5%	60 (for 2 coats)

DFT is measured from the highest point of the substrate to the surface of the paint.

2. Workmanship (Contractor/ Applicator/ Painter)

It is the responsibility of the appointed applicator/ painter to prepare and make sure that the surface to be painted is suitable and ready for painting which provides the basis for the expected performance of the paint system to be realized and warranted. The involved parties are welcomed to make arrangement to discuss further on the painting application with us.

3. Surface Preparation

New Unpainted Surface	Previous Painted Surface
- Ensure surface is clean and dry - Apply appropriate sealer	- Remove loose paint film by hard scraping/ high pressure water jet - Treat fungi, algae or mould with TRANS PAINT Pluss Biocidal Wash - Ensure dry off before painting

- In general cementitious surfaces may be highly alkaline especially when new.
- The moisture and alkalinity in fresh masonry may combine to attack many types of coatings by a process called hydrolysis which subsequently leads to film deterioration (chalking, colour fading, loss of adhesion etc.).

- c. Depending on the environment, the substrate needs at least 30 to 60 days to cure or until a surface pH of 9 is realized.
- d. Cracks must be patched using appropriate compound such as mortar, plaster, caulk etc. paying attention to the suitability of the materials in your application (exterior or interior).
- e. Joints and patches must be checked for its pH level as well before painting, with the same treatment as the cement substrate.
- f. Moisture content in the substrate can be checked with a moisture detector. A typical unit would have simple indicator showing the levels of dampness at which painting is permissible or otherwise.
- g. Efflorescence, crusty white salt deposits leached from masonry as moisture passes through, is common in many masonry surfaces. It must be removed thoroughly prior to painting and the cause must be determined and corrected to avoid reoccurrence on painted surfaces.

4. Material Usage

We reserve the right to know the source and the quantity of paint material purchased for the project. The amount should be consistent with our assessed paint consumption and in the event that the variance is significantly lower than our estimates, we reserve the right to withhold the issuance of the warranty.

5. Site Inspection

As detailed in 3, our representative may/ shall perform random site inspections in the process of surface preparation and painting of the project. We reserve the right to sample the wet paint and remove paint film for testing. Any non-conformance against our recommendation and conditions will render the warranty to be unsuccessful. Please take note also that we expect only our approved paint containers to be allowed at site and the presence of other brands' containers will be viewed with great suspicion and may jeopardise our warranty.

6. Paint Warranty

Warranty against paint defects on products shall be provided for a period of seven (7) years based on a diminution of percentage (%) in value commencing from the date of practical completion of the project as follows:

Year (from warranty commencement date)	1st	2nd	3rd	4th	5th	6th	7th
Claim Coverage (of defective area)	100%	100%	100%	100%	100%	50%	30%

Other information, exclusions, terms, conditions and claims are detailed in the warranty form.

THIS IS A COMPUTER GENERATED DOCUMENT AND NO SIGNATURE REQUIRED.

D019_PREFERRED* EXTERIOR COLOURS FROM RALSTON INSPIRATION (NU-COTE WEATHER)

REV:190301

H00140	H04440	P08430	P13110	G17960	G20310	G22950	N33040	N44020	N53040
H00150	H04450	P08440	P13120	G18010	G20340	G22970	N33050	N44030	N53050
H00160	H04540	P08450	P13130	G18020	G20350	G23010	N33060	N44040	N53060
H00250	H04550	P08460	P13140	G18030	G20370	G23030	N33070	N44050	N53070
H00350	H04630	P08510	P13210	G18040	G20410	G23050	N34020	N44060	N53080
H00450	H04650	P09050	P13220	G18050	G20440	G23060	N34030	N44070	N54010
H00550	H04660	P09110	P13230	G18060	G20450	G23070	N34040	N45010	N54020
H00560	H04730	P09120	P13240	G18120	G20460	G23110	N34050	N45020	N54030
H00740	H04750	P09130	P13250	G18130	G20510	G23120	N34060	N45030	N54040
H00750	P04920	P09150	P13260	G18150	G20540	G23130	N34070	N45040	N54050
H00760	P05120	P09160	P13310	G18160	G20550	G23140	N34080	N45050	N54060
H00820	P05520	P09210	P13320	G18220	G20570	G23150	N35010	N45060	N54070
H00830	P05530	P09220	P13330	G18240	G20610	G23160	N35020	N45070	N54080
H00840	P05920	P09240	P13340	G18370	G20620	N26010	N35030	N45080	N55010
H00850	P05930	P09260	P13350	G18420	G20650	N26020	N35040	N46010	N55020
H00860	P05940	P09320	P13410	G18460	G20710	N26030	N35050	N46020	N55030
H00940	P06210	P09330	P13420	G18470	G20720	N26040	N35060	N46030	N55040
H00950	P06220	P09340	P13430	G18540	G20730	N26050	N35070	N46040	N55050
H01020	P06250	P09360	P13440	G18560	G20750	N26060	N35080	N46050	N55060
H01030	P06260	P09420	P13450	G18570	G20760	N26070	N36020	N46060	N55070
H01040	P06360	P09430	P13460	G18620	G20810	N26080	N36030	N46070	N55080
H01050	P06520	P09440	P13510	G18630	G20820	N27010	N36040	N46080	N56010
H01060	P06530	P09450	P13530	G18710	G20850	N27020	N36060	N47010	N56020
H01120	P06540	P09620	P13540	G18720	G20910	N27030	N36070	N47020	N56030
H01130	P06550	P09660	P13550	G18730	G20950	N27040	N37010	N47030	N56040
H01140	P06560	P10510	P13560	G18740	G20960	N27050	N37020	N47040	N56050
H02450	P06630	P10520	P13620	G18750	G21010	N27060	N37030	N47050	N56060
H02950	P06710	P10610	P13630	G18810	G21040	N27080	N37040	N47060	N56070
H02960	P06720	P10620	P13640	G18820	G21050	N28010	N37060	N47070	N56080
H02970	P06760	P10710	P13650	G18830	G21110	N28020	N37070	N47080	N57010
H03010	P06810	P10720	P13720	G18840	G21120	N28030	N38010	N48010	N57020
H03020	P06920	P11010	P13730	G18910	G21150	N28040	N38020	N48020	N57030
H03030	P06930	P11020	P13740	G18920	G21160	N28050	N38030	N48030	N57040
H03050	P06960	P11030	P13750	G18930	G21170	N28060	N38040	N48040	N57050
H03060	P07010	P11110	P13830	G19070	G21210	N28070	N38060	N48050	N57060
H03120	P07110	P11120	P13840	G19130	G21220	N28080	N38070	N48060	N57070
H03130	P07120	P11210	P13850	G19230	G21240	N29010	N39010	N48070	N57080
H03140	P07130	P11310	P13950	G19240	G21250	N29020	N39020	N49020	W23210
H03150	P07150	P11410	P14040	G19310	G21270	N29030	N39030	N49030	W23310
H03170	P07160	P11420	P14050	G19350	G21350	N29040	N39040	N49040	W23320
H03210	P07210	P11610	P14310	G19360	G21450	N29050	N39060	N49060	W23410
H03250	P07460	P11730	P14330	G19460	G21550	N29060	N39070	N49070	W23420
H03260	P07510	P11740	P14340	G19530	G21560	N29070	N40010	N49080	W23430
H03310	P07620	P11750	P14350	G19560	G21610	N30010	N40020	N50010	W23530
H03340	P07630	P11830	P15510	G19610	G21620	N30020	N40030	N50020	W23630
H03350	P07650	P11840	P17010	G19630	G21650	N30030	N40040	N50030	W23810
H03420	P07660	P11860	P17020	G19640	G21660	N30040	N40060	N50040	W23820
H03440	P07720	P12060	P17030	G19660	G21670	N30050	N40070	N50050	W23830
H03450	P07730	P12320	P17050	G19740	G21750	N30060	N41010	N50070	W23910
H03540	P07740	P12330	P17060	G19750	G22010	N30070	N41020	N50080	W23920
H03630	P07750	P12340	G17360	G19760	G22020	N31010	N41030	N51010	W23930
H03640	P07760	P12510	G17450	G19810	G22050	N31020	N41040	N51020	W24020
H03650	P07810	P12620	G17610	G19820	G22070	N31030	N41060	N51030	W24030
H03740	P07820	P12640	G17620	G19840	G22610	N31040	N41070	N51040	W24110
H03750	P07840	P12720	G17630	G19850	G22710	N31050	N41080	N51050	W24130
H03810	P07850	P12730	G17640	G19870	G22720	N31060	N42010	N51060	W24520
H03830	P07860	P12740	G17650	G19930	G22740	N31070	N42020	N51070	W24630
H03840	P07930	P12810	G17660	G19940	G22750	N31080	N42030	N51080	W25010
H03850	P07950	P12820	G17670	G19970	G22770	N32010	N42040	N52010	W25020
H03860	P08010	P12830	G17730	G20030	G22810	N32020	N42050	N52020	W25030
H03940	P08050	P12840	G17810	G20040	G22820	N32030	N42060	N52030	W25110
H03950	P08060	P12850	G17820	G20070	G22830	N32040	N42070	N52040	W25120
H04050	P08110	P12910	G17830	G20110	G22840	N32050	N43010	N52050	W25210
H04140	P08220	P12920	G17840	G20140	G22860	N32060	N43030	N52060	W25220
H04150	P08310	P12930	G17850	G20150	G22870	N32070	N43040	N52070	W25310
H04240	P08320	P12940	G17860	G20160	G22910	N32080	N43060	N52080	W25320
H04250	P08330	P13020	G17930	G20210	G22920	N33010	N43070	N53010	W25330
H04340	P08350	P13030	G17940	G20240	G22930	N33020	N43080	N53020	
H04350	P08360	P13040	G17950	G20250	G22940	N33030	N44010	N53030	688 COLOURS

* Better colour fastness property i.e. colours that show comparatively less fading upon natural weathering

SEVEN-YEAR LIMITED PRODUCT PERFORMANCE WARRANTY

NU-COTE WEATHER

- PRODUCT WARRANTY REQUEST FORM -
PROJECT INFORMATION

Trans Paint Coatings Sdn Bhd (hereinafter called 'TRANS PAINT') warrants the painting of

Project/ Premise Name -

Location -

Owner -

Contractor -

Applicator/ Painter -

Authorized Dealer -

Nature of Painting Job ☐ New Construction ☐ Repainting (tick) -

Painting Commenced on -

Painting Completed on -

Effective Warranty Period

CONDITIONS & LIMITATIONS

TRANS PAINT shall provide a **SEVEN (7)** Year Limited Product Performance Warranty to the above-mentioned project owner commencing from the actual completion date(s) as specified against the following paint defects caused by weathering in the natural elements.

PEELING	Paint films peel away from building surface other than that caused by the presence of moisture or efflorescence from the substrate.
CRACKING	Cracking in the paint film other than that caused by plastering or substrate cracks.
EXCESSIVE FADING	Paintwork loses its colour or fades excessively in patches and uneven discoloration appears other than that caused by the presence of moisture or high alkalinity from the substrate. However, gradual fading is a normal condition since all exterior paints exhibit fading when exposed to weather.
EXCESSIVE CHALKING	Paint films chalk more than normal for emulsion paint and has adversely affected the appearance on the paintwork.
FUNGUS & ALGAE GROWTH	Growth of microorganisms on the paint surface which results in the marring of the appearance of the paintwork. However, fungus and algae may form on surfaces over time because of moisture and periodical removal shall be required and considered part of routine Owner maintenance and is not covered by the Warranty.

1. The warranty does not cover:

- Products that have not been paid in full.
- Horizontal surfaces and plywood siding.
- Minor imperfection in paint that do not affect the product's integrity or obscure appearance or minor variations in colour.

2. The warranty excludes defects arising from the followings:

- Structural faults or movements, Acts of God or job damage or excessive accumulation of atmospheric dirt, stains or other factors beyond the control of TRANS PAINT.
- Attack from chemical agents, fumes, liquids or solids other than direct rain falling on to the product under warranty.
- Application subject to severe industrial or unusual environments at any time unless specifically stated otherwise.
- Damage of the painted surface resulting from vandalism or any intentional and unintentional heavy impact.
- Defects following alteration or extension work onto the affected areas of building without the prior consent or agreement from TRANS PAINT.

3. The warranty is subject to the following terms and conditions:

- Only selected exterior colours by TRANS PAINT [(D019_PREFERRED Exterior Colours From Ralston Inspiration (Nu-Cote Weather))] shall be considered for issuance of performance warranty.
- The product is used strictly in accordance with TRANS PAINT application recommendations. The contractor/ applicator is responsible for ensuring a sound surface for painting.
- The paint being applied must be unadulterated. TRANS PAINT has the right to sample the wet paint and remove paint film for testing.
- The surface being applied is not affected by water leakage or in contact with soil, ashes, fertilizers, or other moisture retaining substances. TRANS PAINT has the right to pre-inspect the project site before painting.
- TRANS PAINT extends this warranty solely to the owner and is not applicable to any third party.
- The warranty shall be limited to the extent of TRANS PAINT making good the affected areas only.
- The warranty is void if any other paint or film is applied on the warranted paint surface.
- In the case of extended painting period in a single project, the Warranty shall commence from the earliest date of painting job carried out in that project.
- Periodical cleaning of the exterior surface is deemed necessary in maintaining the aesthetic and durability of the paint system. An interval of twelve (12) months is recommended between each cleaning, depending on environmental conditions. The maintenance program is not covered by the Warranty.
- TRANS PAINT shall not be liable or responsible for any loss/ consequential loss arising from any paint defects if any of the above-mentioned terms and conditions is breached.

4. Followings is the procedure for claims:

- All claims shall be made in writing to Trans Paint Coatings Sdn Bhd of 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak.
- An investigation technical team shall conduct the nature of claim within ONE (1) week from receipt of the formal claims.
- TRANS PAINT shall bear the **cost of paint materials only** if the investigation concludes the defects are within the scope of warranty which shall be based on a diminution of percentage (%) in value commencing from the date of practical completion of the project as follows:

Year (from warranty commencement date)	1st	2nd	3rd	4th	5th	6th	7th
Claim Coverage (of defective area)	100%	100%	100%	100%	100%	50%	30%

- Due to fading and normal weathering, a perfect match cannot be achieved and a perfect match is not covered by the Warranty.
- The warranty on any replacement product will extend for the balance of the original warranty period.
- TRANS PAINT shall not be liable or responsible for the claim if the investigation concludes that the defects to be out of the scope of the warranty as provided in clause 1 and 2.

Contractor/ Applicator's acknowledgement

I/We have understood and hereby accept the conditions and limitations stipulated above in order for the warranty to be effective.

Signature and Stamp

Date

Note: Contractor/ Applicator to fill/ sign in the relevant information in the space marked 'X' and return to TRANS PAINT factory at Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak or fax to 082-339189 before the Product Warranty can be issued.



TRANS[®]
P A I N T












**TREND
COLOUR
180**

BRINGS YOU QUALITY

www.transpaint.yungkong.com

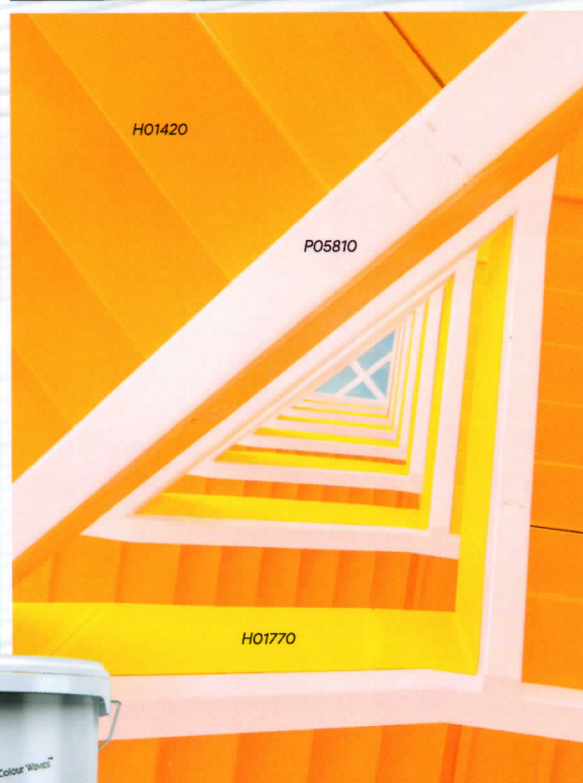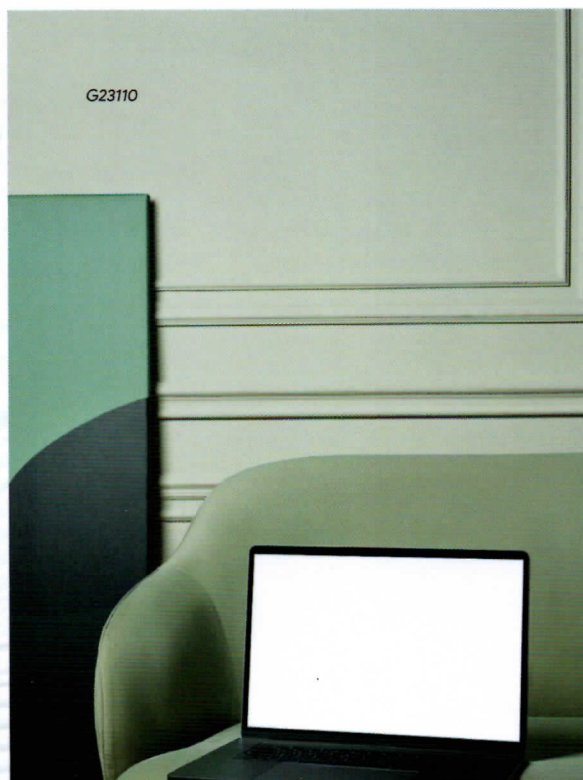

BEAUTY.
NOT WITHOUT HUES.

				
● P14120	● P14330	● P13310	P12410	● P11110
				
● P14540	● P13720	● P13820	● P11310	P11220
				
● H04010	● P14130	● P13020	● P12320	P11320
				
● H03830	● P14140	● P13830	● P12520	P10840
				
● H04240	● P14150	● P13540	● P12330	P11240
				
● H04440	● P14560	● P13030	P12430	P11630
				
● G21930	● H03810	● P12840	● P12550	P11660
				
● G22250	● H03630	● P13560	● P12560	● H02370
				
● G22350	● G21950	● H03340	● H03030	P11660

● Preferred Exterior Colours

● Limited Outdoors Colours

 Vibrant/bright colours may need more than two coats to achieve satisfactory hiding.



H01910	P11210	P08010	P10710	G23170
H01930	P10620	P07810	P08710	P07210
H02030	P09420	P07410	P08310	P08220
H02040	P09440	P08330	P09010	P08320
H02160	G18910	P07630	P06720	P07730
G19740	G18930	P07130	P07120	P07940
G19750	H01850	G18050	G18020	P07750
H02840	G19130	G17450	G17660	G18030
H03050	G19140	H00450	G18150	G18740






























● Preferred Exterior Colours

◐ Limited Outdoors Colours



The colours on this card are as close to actual paint colours as modern printing techniques will allow.



				
● P08610	● P10110	● G22870	● G23070	● P14810
				
● P09020	● P09320	● G22910	● P14310	● G22810
				
● P08030	● P09110	● G23110	● G23020	● G22820
				
● P07930	● P09220	● G22720	● G23030	● G22920
				
● P07840	● P09120	● G22930	● G22830	● G22860
				
● P07950	● P09230	● G23160	● G23040	● G21620
				
● P07150	● P07960	● G23140	● G22740	● G22840
				
● G18420	● P09160	● G22940	● G19360	● G22750
				
● G18040	● G18820	● G23050	● G22850	● G22950









● Preferred Exterior Colours

● Limited Outdoors Colours



Final colour appearance/perception may be affected by area, source of lighting and adjacent colours.



 P09620	 P06830	 P06210	 P05120	 P16630
 P08730	 P07540	 P05810	 P05330	 P16130
 P09930	 P07340	 P05630	 P05340	 P15750
 P10060	 H01330	 P06030	 H00710	 H04410
 H01720	 H01220	 P05840	 H00820	 P16660
 H01770	 H01230	 G17530	 H00430	 H04720
 H01520	 H00920	 G17620	 H00950	 H04730
 H01420	 H01140	 G17360	 H00730	 H04630
 H01440	 G18240	 G17950	 H00840	 G22460

● Preferred Exterior Colours

◐ Limited Outdoors Colours



For exterior application, choose from Preferred Exterior Colours or at least Limited Outdoors Colours to reduce premature colour fading.



P07120

P13540

P14560

P07130

P07340

P09420



COLOURS.
OUR CUP OF TEA.



Colour Waves™ Computerised Colour Tinting System is another innovative solution from **TRANS PAINT** which incorporates the trendsetting two base paints system into a computerised colour tinting dispenser that allows its users to explore the unlimited color possibilities for your lifestyle. Powered by the dedicated colorant technology from The Netherlands and combined with high quality base paints formulated for our local climate, the result is an exclusive range of products that is distinctively superior from its class in terms of brilliance in color, hiding power and other crucial paint properties.



Technology By
Ralston
 COLOUR & COATINGS
 The Netherlands



Trans Paint Coatings Sdn. Bhd. (197801000459)
 Lot 1393, Jalan Meranti, Bintawa Industrial Estate,
 93450 Kuching, Sarawak, East Malaysia.
 Tel. 6082-334 222/ 6082-334 166, Fax. 6082-339 189
www.transpaint.yungkong.com

