

NU-COTE OCEANGLO

Easy-Clean Interior Finish







NU-COTE OCEANGLO



Water-Based
Low VOC
Formaldehyde Free
Heavy-Metals Free
APEO Free

Premium interior high sheen wall finish (water-based)				
Standard Packing	5L & 20L (White Only) 1L, 5L & 20L available via Colour Waves™			
Colours	Ralston Inspiration Trend Colour 150 Your Style Collection			
Application	Interior only			
For use on	Concrete/ Masonry			

- 100% acrylic water based finish excellent durability
- Attractive mid sheen finish
- Superior alkaline and efflorescence resistance
- Easy clean resistant to common household stains and cleans off easily



NU-COTE OCEANGLO

This is a premium full acrylic interior wall paint. The paint film is lustrous, highly durable and washable with a smooth and luxury mid sheen finish. The formulation has very low VOC and is free from heavy metals gives you peace of mind when using this product. It is best used for most room conditions with limited tolerance against high atmospheric humidity such as kitchens and bathrooms. This water-based product features low VOC, formaldehyde free, heavy-metals free and APEO free, formulated with great care for your ease of mind when considering its effect to your health and the environment.

Colour	9102 White (standard colour)		
	Colours available via Colour Waves		
Pack Size	5 and 20 litres (1L available via Colour Waves)		
Composition	Binder	Pure acrylic emulsion	
	Pigment	Inorganic, organic pigments and minera	l extenders
	Solvent	Water	
Volume Solid	$40 \pm 2\%$ for standard w	hite, varying with colours	
		, , ,	
Recommended Dry Film thickness	30 – 50 microns (per coat)		
Drying Times *	Touch dry	Within 30 minutes	
	Hard Dry	Within 1 hour	
Full Cure *	3 – 4 weeks; Time for the coating to reach its full chemical/mechanical		
	properties and will res	st and perform as per the properties featur	red
Over-coating Interval *	Minimum 2 hours		
Spreading Rate *	8 – 13 m²/litre coat		
Application	Brush/Roller	Use as is, thin not exceeding 5% by volume with water if necessary	
	Conventional Spray	Thin with water to 20% by volume	
	Airless Spray	Thin with water to 10% by volume	
Surface Preparation	New Unpainted Surfac	Previous Painted Surface	
Concrete/Masonry	Ensure surface is cle		·
	Apply appropriate so	saler scraping/high pressure Treat fungi, algae or m	water jet
		fungicidal wash Ensure dry off before p	painting
Recommended Painting System	Sequence	Product	
Concrete/Masonry	Primer (1 coat)	PLUSS AP SEALER SV	
	Finish (2 coats)	NU-COTE OCEANGLO	

^{*} Based on recommended thickness; will vary considerably with surface characteristics, application techniques, weather and wastage.

The corresponding Safety Data Sheet (SDS) for this product shall be provided upon request.

Further inquiry and SDS request can be made to transpaint@yungkong.com

Manufactured by: Trans Paint Coatings Sdn Bhd. Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, Malaysia.

Tel: +6082 334 222 Fax: +6082 339 189 Website: www.transpaint.yungkong.com

While every care has been taken to ensure the accuracy of the information contained in this data sheet, it is provided in good faith and that no liability can be accepted arising from its use. Where the conditions of use warrant it, it is recommended that the data are checked to ensure their suitability for the use envisaged.


Revision: 6 NOV 2023 <end of document>



TREND COLOUR 180



www.transpaint.yungkong.com

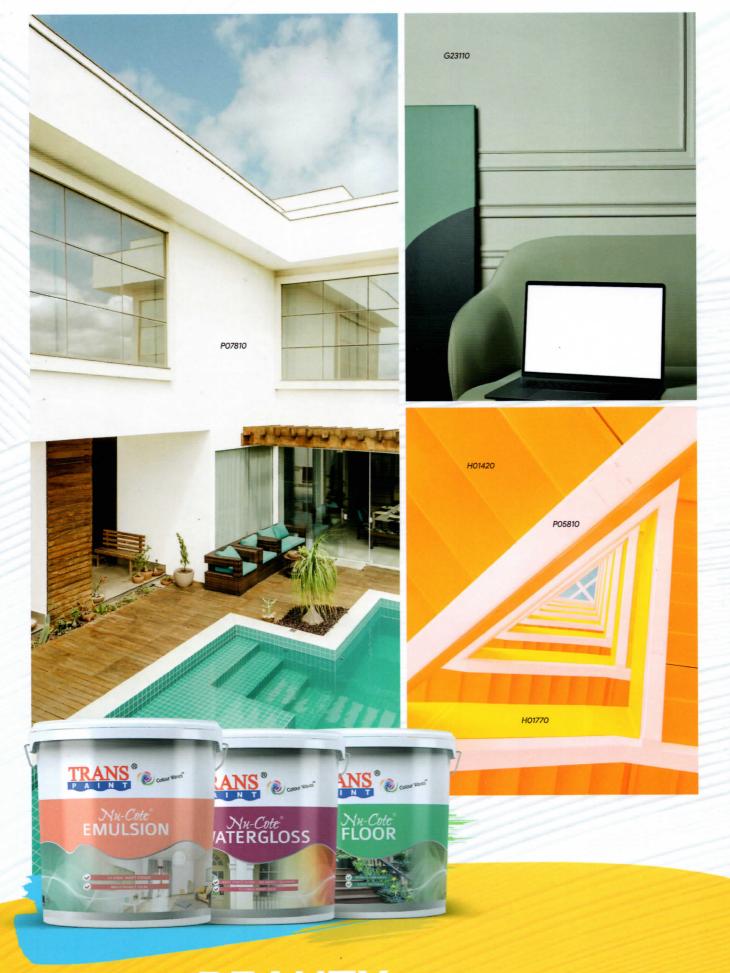

BEAUTY. NOT WITHOUT HUES.



- Preferred Exterior Colours
- Limited Outdoors Colours
- Wibrant/bright colours may need more than two coats to achieve satisfactory hiding.





- Preferred Exterior Colours
- Limited Outdoors Colours
- The colours on this card are as close to actual paint colours as modern printing techniques will allow.



- Preferred Exterior Colours
- Limited Outdoors Colours
- Final colour appearance/perception may be affected by area, source of lighting and adjacent colours.



- Preferred Exterior Colours
- Limited Outdoors Colours







COLOURS. OUR CUP OF TEA.



Colour Waves™ Computerised Colour Tinting System is another innovative solution from TRANS PAINT which incorporates the trendsetting two base paints system into a computerised colour tinting dispenser that allows its users to explore the unlimited color possibilities for your lifestyle. Powered by the dedicated colorant technology from The Netherlands and combined with high quality base paints formulated for our local climate, the result is an exclusive range of products that is distinctively superior from its class in terms of brilliance in color, hiding power and other crucial paint properties.



Ralston
COLOUR & COATINGS
The Netherlands





Trans Paint Coatings Sdn. Bhd. (197801000459) Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, East Malaysia. Tel. 6082-334 222/ 6082-334 166, Fax. 6082-339 189 www.transpaint.yungkong.com

