



SIRIM
CERTIFIED TO MS 903: 1984
Certification No. PT001301

TRANS[®]
P A I N T



NU-COTE EMULSION

Classic Matt Interior Finish



Water-Based
Low VOC
Formaldehyde Free
Heavy-Metals Free
APEO Free

NU-COTE EMULSION

Premium interior matt wall finish (water-based)	
Standard Packing	5L & 20L (White Only) <i>1L, 5L & 20L available via Colour Waves™</i>
Colour	Ralston Inspiration Trend Colour 150 Your Style Collection
Application	Interior only
For use on	Concrete/ Masonry
• Matt water based finish - minimizes surface irregularities • Outstanding opacity - saves application time • Ease of application - easy clean up and low odour • Approved by SIRIM to MS 903:1984	



SIRIM
CERTIFIED TO MS 903: 1984
Certification No. PT001301

NU-COTE EMULSION

This is a premium vinyl acrylic emulsion paint designed for interior surfaces. It has a good flow with excellent hiding power, and cures to a classic matt finish. The formulation has very low VOC and is free from heavy metals gives you peace of mind when using this product. It can be used on interior walls of living rooms, bedrooms, common rooms, stairways, etc. This **water-based** product features **low VOC**, **formaldehyde free**, **heavy-metals free** and **APEO free**, formulated with great care for your ease of mind when considering its effect to your health and the environment.

Standard	Approved to Malaysian Standard 903:1984 (Cert. No. PT001301)	
Colour	9102 White (standard colour) <i>Colours available via Colour Waves</i>	
Pack Size	5 and 20 litres (1L available via Colour Waves)	
Composition	<i>Binder</i>	Vinyl acetate-acrylic ester copolymer emulsion
	<i>Pigment</i>	Inorganic, organic pigments and mineral extenders
	<i>Solvent</i>	Water
Volume Solid	32 ± 2% for standard white, varying with colours	
Recommended Dry Film Thickness	30 – 50 microns (per coat)	
Drying Times *	<i>Touch Dry</i>	Within 30 minutes
	<i>Hard Dry</i>	Within 1 hour
Full Cure *	3 – 4 weeks; Time for the coating to reach its full chemical/mechanical properties and will resist and perform as per the properties featured	
Over-coating Interval *	Minimum 2 hours	
Spreading Rate *	7 – 11 m ² /litre/coat	
Application	<i>Brush/Roller</i>	Use as is, thin not exceeding 5% by volume with water if necessary
	<i>Conventional Spray</i>	Thin with water to 20% by volume
	<i>Airless Spray</i>	Thin with water to 10% by volume
Surface Preparation	<u><i>New Unpainted Surface</i></u>	<u><i>Previous Painted Surface</i></u>
	• Ensure surface is clean and dry • Apply appropriate sealer	• Remove loose paint film by hard scraping/high pressure water jet • Treat fungi, algae or mould with fungicidal wash • Ensure dry off before painting
Recommended Painting System	<u><i>Sequence</i></u>	<u><i>Product</i></u>
	Concrete/Masonry Primer (1 coat) Finish (2 coats)	NU-COTE WALL SEALER NU-COTE EMULSION

* Based on recommended thickness; will vary considerably with surface characteristics, application techniques, weather and wastage.

The corresponding Safety Data Sheet (SDS) for this product shall be provided upon request.	
Further inquiry and SDS request can be made to transpaint@yungkong.com	
Manufactured by: Trans Paint Coatings Sdn Bhd . Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, Malaysia.	
Tel: +6082 334 222 Fax: +6082 339 189 Website: www.transpaint.yungkong.com	
While every care has been taken to ensure the accuracy of the information contained in this data sheet, it is provided in good faith and that no liability can be accepted arising from its use. Where the conditions of use warrant it, it is recommended that the data are checked to ensure their suitability for the use envisaged.	
Revision: 6 NOV 2023	<end of document>

LESEN PENSIJILAN BARANGAN

Product Certification Licence



SIRIM QAS International Sdn. Bhd. dengan ini menganugerahkan kepada
SIRIM QAS International Sdn. Bhd. hereby grants to

**TRANS PAINT COATINGS SDN. BHD.
WISMA HII YII NGIHK
1ST FLOOR LOT 7573
JALAN KWONG LEE BANK
93450 KUCHING
SARAWAK, MALAYSIA**

Lesen untuk menggunakan Tanda Pensijilan di atas barangan
a licence to use the Certification Mark on

LATEX EMULSION PAINT FOR INTERIOR USE

Please refer to detail in the SCHEDULE

sebagai mematuhi keperluan
as complying with

MS 903 : 1984



Nur Fadhilah binti Muhammad
Ketua Pegawai Eksekutif
Chief Executive Officer
SIRIM QAS International Sdn. Bhd.



SCHEDULE

TRANS PAINT COATINGS SDN. BHD.



Trade Mark : NU-COTE

Factory Name and Location :
TRANS PAINT COATINGS SDN. BHD.
LOT 1393, JALAN MERANTI
BINTAWA INDUSTRIAL ESTATE
93450 KUCHING
SARAWAK, MALAYSIA

End of page

SIRIM QAS International Sdn. Bhd.
(No. Syarikat 199601037981(410334-X))

1, Persiaran Dato' Menteri
Seksyen 2, Peti Surat 7035
40700 Shah Alam
Selangor Darul Ehsan
MALAYSIA.

Tel : 603-5544 6400
Emel : cserviceqas@sirim.my

<https://www.sirim-qas.com.my>
<https://www.malaysiancertified.com.my>

Tarikh Mula Pensijilan : 31 December 1988

Certified Since

Sah Sehingga : 31 December 2023

Valid Until

Lesen ini dianugerahkan tertakluk kepada syarat-syarat Perjanjian Pensijilan Barangan SIRIM QAS International Sdn. Bhd.
This Licence is granted subject to the provisions of the Product Certification Agreement of SIRIM QAS International Sdn. Bhd.

Tarikh Dikeluarkan : 29 December 2022

Issue Date

No Siri : 080980

Serial No



TRANS®
P A I N T












**TREND
COLOUR
180**

BRINGS YOU  QUALITY

www.transpaint.yungkong.com

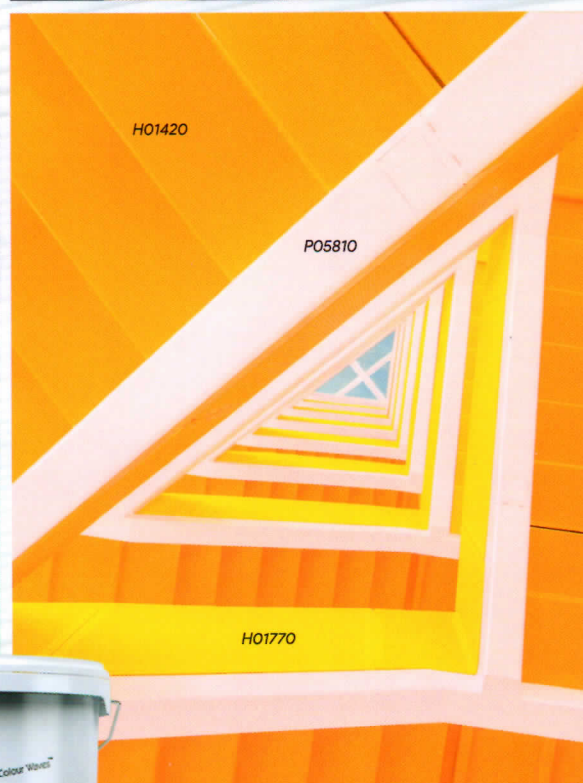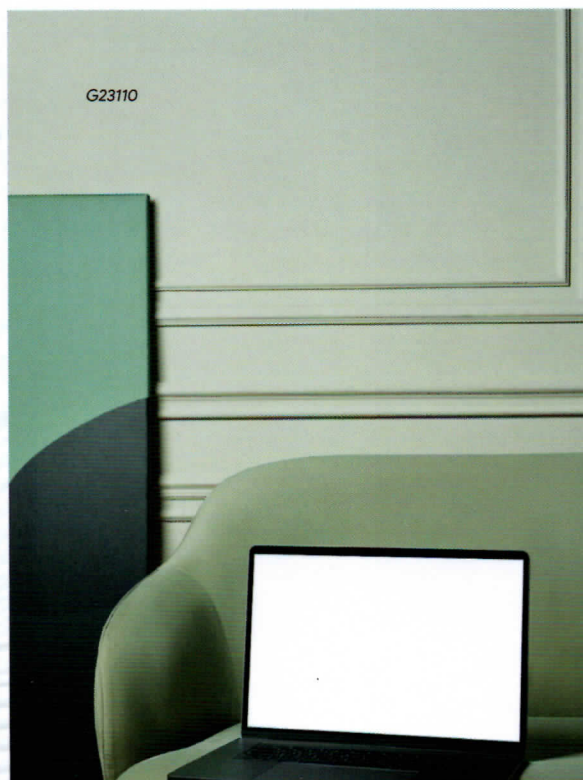

BEAUTY.
NOT WITHOUT HUES.

				
● P14120	● P14330	● P13310	P12410	● P11110
				
● P14540	● P13720	● P13820	● P11310	P11220
				
● H04010	● P14130	● P13020	● P12320	P11320
				
● H03830	● P14140	● P13830	● P12520	P10840
				
● H04240	● P14150	● P13540	● P12330	P11240
				
● H04440	● P14560	● P13030	P12430	P11630
				
● G21930	● H03810	● P12840	● P12550	P11660
				
● G22250	● H03630	● P13560	● P12560	H02370
				
● G22350	● G21950	● H03340	● H03030	H02620

● Preferred Exterior Colours

● Limited Outdoors Colours

 Vibrant/bright colours may need more than two coats to achieve satisfactory hiding.



	H01910		P11210		P08010		P10710		G23170
	H01930		P10620		P07810		P08710		P07210
	H02030		P09420		P07410		P08310		P08220
	H02040		P09440		P08330		P09010		P08320
	H02160		G18910		P07630		P06720		P07730
	G19740		G18930		P07130		P07120		P07940
	G19750		H01850		G18050		G18020		P07750
	H02840		G19130		G17450		G17660		G18030
	H03050		G19140		H00450		G18150		G18740






























● Preferred Exterior Colours

◐ Limited Outdoors Colours



The colours on this card are as close to actual paint colours as modern printing techniques will allow.



				
● P08610	● P10110	● G22870	● G23070	● P14810
				
● P09020	● P09320	● G22910	● P14310	● G22810
				
● P08030	● P09110	● G23110	● G23020	● G22820
				
● P07930	● P09220	● G22720	● G23030	● G22920
				
● P07840	● P09120	● G22930	● G22830	● G22860
				
● P07950	● P09230	● G23160	● G23040	● G21620
				
● P07150	● P07960	● G23140	● G22740	● G22840
				
● G18420	● P09160	● G22940	● G19360	● G22750
				
● G18040	● G18820	● G23050	● G22850	● G22950











● Preferred Exterior Colours

● Limited Outdoors Colours



Final colour appearance/perception may be affected by area, source of lighting and adjacent colours.



 P09620	 P06830	 P06210	 P05120	 P16630
 P08730	 P07540	 P05810	 P05330	 P16130
 P09930	 P07340	 P05630	 P05340	 P15750
 P10060	 H01330	 P06030	 H00710	 H04410
 H01720	 H01220	 P05840	 H00820	 P16660
 H01770	 H01230	 G17530	 H00430	 H04720
 H01520	 H00920	 G17620	 H00950	 H04730
 H01420	 H01140	 G17360	 H00730	 H04630
 H01440	 G18240	 G17950	 H00840	 G22460

● **Preferred Exterior Colours**

◐ **Limited Outdoors Colours**



For exterior application, choose from Preferred Exterior Colours or at least Limited Outdoors Colours to reduce premature colour fading.



P07120

P13540

P14560

P07130

P07340

P09420



COLOURS.
OUR CUP OF TEA.



Colour WavesTM

Colour WavesTM Computerised Colour Tinting System is another innovative solution from **TRANS PAINT** which incorporates the trendsetting two base paints system into a computerised colour tinting dispenser that allows its users to explore the unlimited color possibilities for your lifestyle. Powered by the dedicated colorant technology from The Netherlands and combined with high quality base paints formulated for our local climate, the result is an exclusive range of products that is distinctively superior from its class in terms of brilliance in color, hiding power and other crucial paint properties.



Technology By
Ralston
COLOUR & COATINGS
The Netherlands



TRANS[®]
PAINT

Trans Paint Coatings Sdn. Bhd. (197801000459)
Lot 1393, Jalan Meranti, Bintawa Industrial Estate,
93450 Kuching, Sarawak, East Malaysia.
Tel. 6082-334 222/ 6082-334 166, Fax. 6082-339 189
www.transpaint.yungkong.com



Certificate No.0402974