



NU-COTE FLOOR

Floor Coating



Certified to MS 134:2007
Certification No. PT001302

TRANS
PAINT

NU-COTE FLOOR



Water-Based
Low VOC
Heavy-Metals Free
APEO Free

Floor coating (water-based)	
Standard Packing	1L, 5L & 20L
Colours	Ralston Inspiration Trend Colour 150 Your Style Collection
Application	Exterior and Interior
For use on	Concrete/ Masonry
• 100% acrylic waterborne floor coating for sealing concrete floors and prevent concrete floor dusting • Withstands considerable wear, abrasion, grease, oils, and cleaning equipment • can be used both interiorly and exteriorly over prepared concrete and wood floors, steps, stairwells, aisle ways etc.	



NU-COTE FLOOR

This is a general purpose pure acrylic waterborne floor coating for sealing concrete floors and prevent concrete floor dusting and to improve the decorative floor appearance. This product dries rapidly to a tough, alkali resistant finish which will withstand considerable wear, abrasion, grease, oils, and cleaning equipment. It can be used interiorly and exteriorly over prepared concrete and wood floors, steps, stairwells, aisle ways, or previously painted floor surfaces in sound condition. This **water-based** product features **low VOC**, **heavy-metals free** and **APEO free**, formulated with great care for your ease of mind when considering its effect to your health and the environment.

Standard	Approved to Malaysian Standard 134:2007 (Cert. No. PT001302)	
Colour	Colours available via Colour Waves only	
Pack Size	1, 5 and 20 litres	
Composition	<i>Binder</i>	Pure acrylic emulsion
	<i>Pigment</i>	Inorganic, organic pigments and mineral extenders
	<i>Solvent</i>	Water
Volume Solid	Average 40 ± 2%, varying with colours	
Recommended Dry Film thickness	30 - 50 microns (per coat)	
Drying Times *	<i>Touch Dry</i>	Within 30 minutes
	<i>Hard Dry</i>	Within 1 hour
Full Cure *	3 – 4 weeks; Time for the coating to reach its full chemical/mechanical properties and will resist and perform as per the properties featured	
Over-coating Interval *	Minimum 2 hours	
Spreading Rate *	8 – 13 m ² /litre/coat	
Application	<i>Brush/Roller</i>	Use as is, thin not exceeding 5% by volume with water if necessary
	<i>Conventional Spray</i>	Thin with water to 20% by volume
	<i>Airless Spray</i>	Thin with water to 10% by volume
Surface Preparation	<u><i>New Unpainted Surface</i></u>	<u><i>Previous Painted Surface</i></u>
<i>Concrete/Masonry/Wood/Timber</i>	Ensure surface is cured, clean and dry	- Remove loose paint film by hard scraping/high pressure water jet - Treat fungi, algae or mould with fungicidal wash - Ensure dry off before painting
Recommended Painting System	<u><i>Sequence</i></u>	<u><i>Product</i></u>
<i>Concrete/Masonry</i>	Finish (2 coats)	NU-COTE FLOOR
<i>Wood/Timber</i>	Primer (1 coat)	PLUSS QD UNDERCOAT
	Finish (2 coats)	NU-COTE FLOOR

* Based on recommended thickness; will vary considerably with surface characteristics, application techniques, weather and wastage.

The corresponding Safety Data Sheet (SDS) for this product shall be provided upon request.	
Further inquiry and SDS request can be made to transpaint@yungkong.com	
Manufactured by: Trans Paint Coatings Sdn Bhd . Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, Malaysia.	
Tel: +6082 334 222 Fax: +6082 339 189 Website: www.transpaint.yungkong.com	
While every care has been taken to ensure the accuracy of the information contained in this data sheet, it is provided in good faith and that no liability can be accepted arising from its use. Where the conditions of use warrant it, it is recommended that the data are checked to ensure their suitability for the use envisaged.	
Revision: 6 NOV 2023	<end of document>

LESEN PENSIJILAN BARANGAN

Product Certification Licence



SIRIM QAS International Sdn. Bhd. dengan ini menganugerahkan kepada
SIRIM QAS International Sdn. Bhd. hereby grants to

**TRANS PAINT COATINGS SDN. BHD.
WISMA HII YII NGIIK
1ST FLOOR LOT 7573
JALAN KWONG LEE BANK
93450 KUCHING
SARAWAK, MALAYSIA**

Lesen untuk menggunakan Tanda Pensijilan di atas barangan
a licence to use the Certification Mark on

LATEX EMULSION PAINT FOR EXTERIOR AND INTERIOR USE

Please refer to detail in the SCHEDULE

sebagai mematuhi keperluan
as complying with

MS 134 : 2007



Nur Fadhilah binti Muhammad
Ketua Pegawai Eksekutif
Chief Executive Officer
SIRIM QAS International Sdn. Bhd.



SCHEDULE

TRANS PAINT COATINGS SDN. BHD.



Trade Mark : Nu-Cote

Model : NU-COTE WEATHER, NU-COTE FLOOR, NU-COTE UVWOOD

Rating : NON-TEXTURED

Factory Name and Location :
TRANS PAINT COATINGS SDN. BHD.
LOT 1393, JALAN MERANTI
BINTAWA INDUSTRIAL ESTATE
93450 KUCHING
SARAWAK, MALAYSIA

End of page

SIRIM QAS International Sdn. Bhd.
(No. Syarikat 199601037981(410334-X))

1, Persiaran Dato' Menteri
Seksyen 2, Peti Surat 7035
40700 Shah Alam
Selangor Darul Ehsan
MALAYSIA.

Tel : 603-5544 6400
Emel : cserviceqas@sirim.my

<https://www.sirim-qas.com.my>
<https://www.malaysiancertified.com.my>

Tarikh Mula Pensijilan : 07 April 2000

Certified Since

Sah Sehingga : 31 December 2023

Valid Until

Lesen ini dianugerahkan tertakluk kepada syarat-syarat Perjanjian Pensijilan Barangan SIRIM QAS International Sdn. Bhd.
This Licence is granted subject to the provisions of the Product Certification Agreement of SIRIM QAS International Sdn. Bhd.

Tarikh Dikeluarkan : 29 December 2022

Issue Date

No Siri : 080981

Serial No



TRANS®
P A I N T












TREND
COLOUR
180

BRINGS YOU QUALITY

www.transpaint.yungkong.com

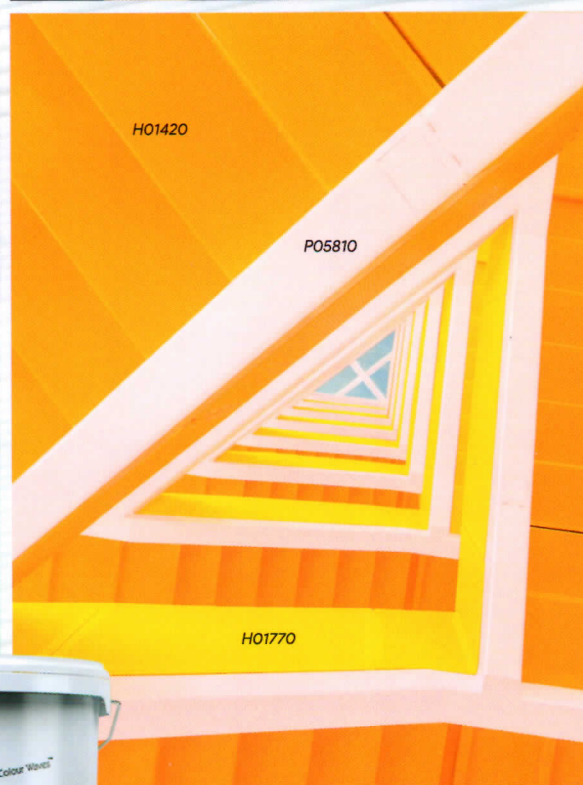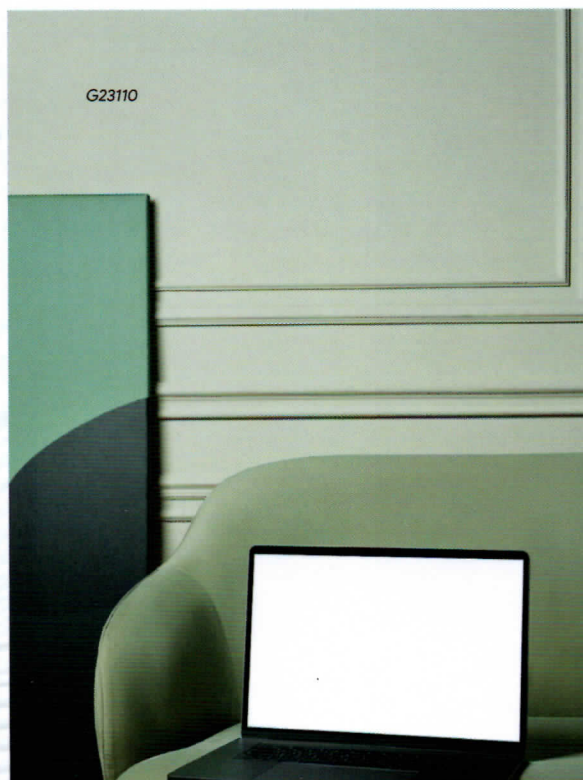

BEAUTY.
NOT WITHOUT HUES.

				
● P14120	● P14330	● P13310	P12410	● P11110
				
● P14540	● P13720	● P13820	● P11310	P11220
				
● H04010	● P14130	● P13020	● P12320	P11320
				
● H03830	● P14140	● P13830	● P12520	P10840
				
● H04240	● P14150	● P13540	● P12330	P11240
				
● H04440	● P14560	● P13030	P12430	P11630
				
● G21930	● H03810	● P12840	● P12550	P11660
				
● G22250	● H03630	● P13560	● P12560	● H02370
				
● G22350	● G21950	● H03340	● H03030	P11660

● Preferred Exterior Colours

● Limited Outdoors Colours

 Vibrant/bright colours may need more than two coats to achieve satisfactory hiding.



H01910	P11210	P08010	P10710	G23170
H01930	P10620	P07810	P08710	P07210
H02030	P09420	P07410	P08310	P08220
H02040	P09440	P08330	P09010	P08320
H02160	G18910	P07630	P06720	P07730
G19740	G18930	P07130	P07120	P07940
G19750	H01850	G18050	G18020	P07750
H02840	G19130	G17450	G17660	G18030
H03050	G19140	H00450	G18150	G18740






























● Preferred Exterior Colours

◐ Limited Outdoors Colours



The colours on this card are as close to actual paint colours as modern printing techniques will allow.



				
● P08610	● P10110	● G22870	● G23070	● P14810
				
● P09020	● P09320	● G22910	● P14310	● G22810
				
● P08030	● P09110	● G23110	● G23020	● G22820
				
● P07930	● P09220	● G22720	● G23030	● G22920
				
● P07840	● P09120	● G22930	● G22830	● G22860
				
● P07950	● P09230	● G23160	● G23040	● G21620
				
● P07150	● P07960	● G23140	● G22740	● G22840
				
● G18420	● P09160	● G22940	● G19360	● G22750
				
● G18040	● G18820	● G23050	● G22850	● G22950






● Preferred Exterior Colours

● Limited Outdoors Colours



Final colour appearance/perception may be affected by area, source of lighting and adjacent colours.



				
P09620	P06830	P06210	P05120	P16630
				
P08730	P07540	P05810	P05330	P16130
				
P09930	P07340	P05630	P05340	P15750
				
P10060	H01330	P06030	H00710	H04410
				
H01720	H01220	P05840	H00820	P16660
				
H01770	H01230	G17530	H00430	H04720
				
H01520	H00920	G17620	H00950	H04730
				
H01420	H01140	G17360	H00730	H04630
				
H01440	G18240	G17950	H00840	G22460

● Preferred Exterior Colours

◐ Limited Outdoors Colours



For exterior application, choose from Preferred Exterior Colours or at least Limited Outdoors Colours to reduce premature colour fading.



P07120

P13540

P14560

P07130

P07340

P09420



COLOURS.
OUR CUP OF TEA.



Colour Waves™ Computerised Colour Tinting System is another innovative solution from **TRANS PAINT** which incorporates the trendsetting two base paints system into a computerised colour tinting dispenser that allows its users to explore the unlimited color possibilities for your lifestyle. Powered by the dedicated colorant technology from The Netherlands and combined with high quality base paints formulated for our local climate, the result is an exclusive range of products that is distinctively superior from its class in terms of brilliance in color, hiding power and other crucial paint properties.



Technology By
Ralston
 COLOUR & COATINGS
 The Netherlands



Trans Paint Coatings Sdn. Bhd. (197801000459)
 Lot 1393, Jalan Meranti, Bintawa Industrial Estate,
 93450 Kuching, Sarawak, East Malaysia.
 Tel. 6082-334 222/ 6082-334 166, Fax. 6082-339 189
www.transpaint.yungkong.com

