

Immerse In The
High-Gloss Enamel

TRANS
PAINT

www.transpaint.yungkong.com



TOP
Cat Kilat





TOP CAT KILAT

Interior gloss finish (solvent-based)	
Standard Packing	250mL, 1L & 5L
Colour	As per colour chart
Application	Interior only
For use on	Iron/ steel Wood/ timber
• Durability proven for cost effective application • Outstanding overall performance as compared to similar competition grades	

TOP CAT KILAT

This is an economical gloss paint for interior as well as limited exterior surfaces. It is easy to apply and has a high gloss finish. It can be used on metal/ wooden railings, frames, doors, panels, etc.

Colour	<i>See Cat Kilat Colour Card</i>	
Pack Size	0.25 (selected colours only), 1, and 5 litres	
Composition	<i>Binder</i>	Long-oil alkyd
	<i>Pigment</i>	Inorganic and organic pigments
	<i>Solvent</i>	Hydrocarbon mixture
Volume Solid	44 ± 2% for standard white, varying with colours	
Recommended Dry Film thickness	25 – 35 microns (per coat)	
Drying Times *	<i>Touch Dry</i>	Within 4 hours
	<i>Hard Dry</i>	Within 8 hours
Full Cure *	3 – 4 weeks; Time for the coating to reach its full chemical/mechanical properties and will resist and perform as per the properties featured	
Over-coating Interval *	Minimum 8 hours	
Spreading Rate *	12 – 17 m ² /litre/coat	
Application	<i>Brush/Roller</i>	Use as is, thin not exceeding 5% by volume with paint thinner or white spirit/mineral turpentine if necessary
	<i>Conventional Spray</i>	Thin with paint thinner or white spirit/mineral turpentine to 20% by volume
	<i>Airless Spray</i>	Use as is
Surface Preparation	<u><i>New Unpainted Surface</i></u>	<u><i>Previous Painted Surface</i></u>
<i>Metal/Mild Steel</i>	- Remove rust or mill scales by manual or mechanical cleaning - Ensure surface free from oil, grease and other contaminant	- Remove loose adhering paint - Remove debris, oil, grease or other contaminant before painting - Use suitable primer
<i>Wood/Timber</i>	- Ensure surface free from oil, grease and other contaminant - Sand surface with abrasive paper for better adhesion and appearance	- Remove loose adhering paint - Ensure surface is clean and dry - Use suitable primer
Recommended Painting System	<u><i>Sequence</i></u>	<u><i>Product</i></u>
<i>Metal/Mild Steel</i>	Primer (1 coat)	TOP GREYGREEN OXIDE 437
	Undercoat (1 coat)	TOP CAT KILAT UNDERCOAT
	Finish (2 coats)	TOP CAT KILAT
<i>Wood/Timber</i>	Undercoat (1 coat)	TOP CAT KILAT UNDERCOAT
	Finish (2 coats)	TOP CAT KILAT

* Based on recommended thickness; will vary considerably with surface characteristics, application techniques, weather and wastage.

The corresponding Safety Data Sheet (SDS) for this product shall be provided upon request.

Further inquiry and SDS request can be made to transpaint@yungkong.com

Manufactured by: **Trans Paint Coatings Sdn Bhd.** Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, Malaysia.

Tel: +6082 334 222 Fax: +6082 339 189 Website: www.transpaint.yungkong.com

While every care has been taken to ensure the accuracy of the information contained in this data sheet, it is provided in good faith and that no liability can be accepted arising from its use. Where the conditions of use warrant it, it is recommended that the data are checked to ensure their suitability for the use envisaged.

Revision: **20 JUL 2023**

<end of document>




TOP
Cat Kilat

**Quality
is Affordable**



- HIGH GLOSS
- OUTSTANDING PERFORMANCE

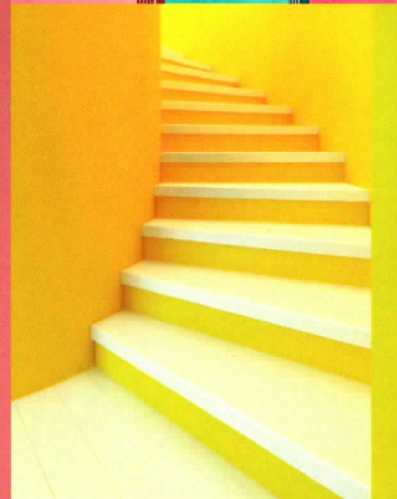



TOP Cat Kilat

✦ **Good Gloss Finish**

✦ **Flexible Film**

✦ **Easy Apply**

Sunrise

7063

Smook

7019

Orange

7143

Ripe

7647

Cream

7040

Golden Honey

7727

Golden Brown

7044

Teak

7137



Also available in White 9102 & Black 9103.



Barky 7527




Pink 7549



Summerset 7007



Milk Tea 7122



Signal Red 7780



Dreamy 7633



Squash 7600



Decent 7009



Medal 7242



Turquoise 7401



Slurpee 7353



Neptune 7031



Wish 7969



Battalion 7761



Pearl 7766



Funky Blue 7440



Rosemary 7212



Jamboree 7420



Pawpaw 7499



Venus 7406




Blessing 7355



Relax 7238



Bling-Bling 7809



Pewter 7095



Real Deal 7466



Emerald 7814



Old Bark 7844



Storm 7151



Cinquasia Red 7361



Apple 7606



Hawaii Blue 7013



Graphite 7097



- HIGH GLOSS
- OUTSTANDING PERFORMANCE

TOP Cat Kilat



INTERIOR



SOLVENT
BASED



MIN 4 HRS
RECOAT



ROLL ON



SPRAY ON



BRUSH ON

INTERIOR GLOSS FINISH

TOP Cat Kilat is an economical gloss paint for interior as well as limited exterior surfaces. It is easy to apply and has a high gloss finish. It can be used on metal or wooden surfaces such as railings, frames, doors, panels, etc.

KEMASAN BERKILAT DALAMAN

TOP Cat Kilat adalah cat berkilat ekonomi untuk kegunaan dalaman mahupun permukaan luaran yang terhad. Ia mudah disapu dan mempunyai kemasan yang berkilat. Ia boleh digunakan pada permukaan besi atau kayu seperti pagar, bingkai, pintu, panel dan sebagainya.

室内油性涂料

TOP Cat Kilat 是一种用于室内外部表面的经济型发亮涂料。它易于涂抹，并具有光滑的表面效果。它可以用于金属或木质表面，例如栅栏，框架，门，面板等。

DIRECTION FOR USE

- Ensure surface is clean and dry.
- Dilute content with turpentine only if necessary.
- Stir well before use.
- Allow ten hours to dry.
- Replace lid tightly after use.
- For more information, please refer to the product Technical Data Sheet (TDS).

CARA MENGGUNA

- Pastikan permukaan bersih dan kering.
- Cairkan dengan turpentine hanya jika perlu.
- Kacau dengan baik sebelum pakai.
- Biarkan selama sepuluh jam untuk kering.
- Tutupkan tudung dengan ketat selepas digunakan.
- Untuk maklumat lanjut, sila rujuk Helaian Risalah Teknikal produk.

用法说明

- 欲确保表面清洁干燥
- 在必要时用打兵油稀释内容物。
- 搅透后方可上漆
- 让十个小时干燥
- 用后要盖紧盖子
- 欲了解更多资讯，请参阅产品技术数据表 (TDS)

COVERAGE

- Approximately 14 meter square per liter.

LIPUTAN

- Lebih kurang 14 meter persegi bagi seliter cat.

覆盖范围

- 松施面积大约每公升十四平方公尺



TRANS
PAINT

Trans Paint Coatings Sdn. Bhd. (197801000459)
Lot 1393, Jalan Meranti, Bintawa Industrial Estate,
93450 Kuching, Sarawak, East Malaysia.
Tel. 6082-334 222/ 6082-334 166, Fax. 6082-339 189
www.transpaint.yungkong.com



Certificate No.0402974

www.transpaint.yungkong.com