



TOP BLACK OXIDE 144

Economy Metal Primer



TOP BLACK OXIDE 144

Economical multipurpose coating (solvent-based)

Standard Packing

1L, 5L & 18L

Colour



Glossy

Application

Interior only

For use on

Iron/ steel

- Cost-effective application
- Improved adhesion and durability

TOP BLACK OXIDE 144

This is an economical multipurpose metal primer/coating for ferrous substrate both interior and exterior applications. It has good moisture resistant property.

Colour	Black	
Pack Size	1, 5 and 18 litres	
Composition	<i>Binder</i>	Hydrocarbon derivative
	<i>Pigment</i>	Carbon black and inert mineral extenders
	<i>Solvent</i>	Hydrocarbon mixture
Volume Solid	61 ± 2%	
Recommended Dry Film thickness	35 – 45 microns (per coat)	
Drying Times *	<i>Touch Dry</i>	Within 2 hours
	<i>Hard Dry</i>	Within 6 hours
Over-coating Interval *	Minimum 12 hours	
Spreading Rate *	12 – 16 m ² /litre/coat	
Application	<i>Brush/Roller</i>	Use as is, thin not exceeding 5% by volume with paint thinner or white spirit/mineral turpentine if necessary
	<i>Conventional Spray</i>	Thin with paint thinner or white spirit/ mineral turpentine to 20% by volume
Surface Preparation	<u><i>New Unpainted Surface</i></u>	<u><i>Previous Painted Surface</i></u>
<i>Metal/Mild Steel</i>	- Remove rust or mill scales by manual or mechanical cleaning - Ensure surface free from oil, grease and other contaminant	- Remove loose adhering paint - Remove debris, oil, grease or other contaminant before painting

* Based on recommended thickness; will vary considerably with surface characteristics, application techniques, weather and wastage.

The corresponding Safety Data Sheet (SDS) for this product shall be provided upon request.

Further inquiry and SDS request can be made to transpaint@yungkong.com

Manufactured by: **Trans Paint Coatings Sdn Bhd**. Lot 1393, Jalan Meranti, Bintawa Industrial Estate, 93450 Kuching, Sarawak, Malaysia.

Tel: +6082 334 222 Fax: +6082 339 189 Website: www.transpaint.yungkong.com

While every care has been taken to ensure the accuracy of the information contained in this data sheet, it is provided in good faith and that no liability can be accepted arising from its use. Where the conditions of use warrant it, it is recommended that the data are checked to ensure their suitability for the use envisaged.

Revision: **20 JUL 2023**

<end of document>




INDUSTRIAL & PROTECTIVE COATINGS

TRANS[®]
P A I N T

Nu-Cote[®] Plus[®] SERIES



PLUS ROAD LINE PAINT



White



Black



Yellow



PLUS Ind Zinc Phosphate
Primer



TOP SERIES



TOP ROAD LINE PAINT



White



Black



Yellow




TOP TRUCK & TRACTOR



Yellow



Black



TOP Aluminium
250



TOP Red Oxide
Glossy 308




TOP Grey Green Oxide
437



TOP Black Oxide
Glossy 144

TOP MARINE & INDUSTRIAL FINISH



White




Black



Red Oxide



Grey

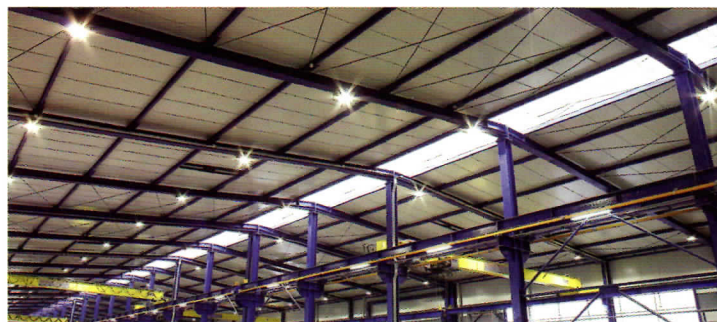

The colours on this card are as close to the actual colours as modern printing techniques allow.